

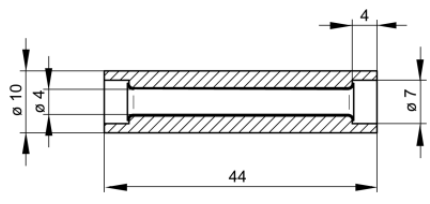


## Sockets

### KD 10



Product	KD 10
description	Insulated coupling with a tin-plated brass tube for two 4 mm diameter plugs.
operating instruction	BA407
article-no. / *colour	9301091xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 10px;">Ni</div>
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>
rated current <sup>(1)</sup> (consider derating curve)	10 A
material socket	brass, tin plated
housing material	PS
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +70 °C
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 29.10.2020