





**Product:** [G 4 KW 1 F black](#)

G-Series Power Single-Ended Cordset: Female, angled, 4-pin, black body, 50V AC/DC, 10 A; PUR black cable, 0.75 mm<sup>2</sup>

**Product Description**

G-Series Power Single-Ended Cordset: Female, angled, 4-pin, black body, 50V AC/DC, 10 A; PUR black cable, 0.75 mm<sup>2</sup>

**Technical Drawing**

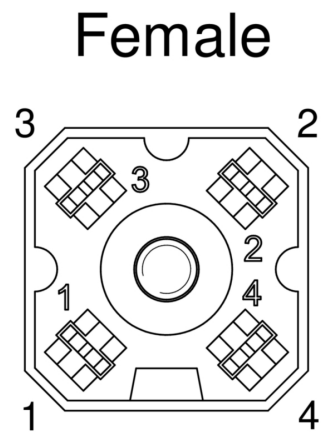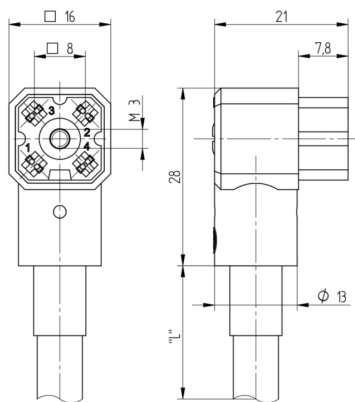

**Technical Specifications**

**Face View**

| Pin 1 | Pin 2 | Pin 3 | Pin 4  |
|-------|-------|-------|--------|
| black | red   | white | yellow |

**Technical Data**

|                           |                       |
|---------------------------|-----------------------|
| Product Family:           | Power Connector       |
| Product Sub Family:       | G Series              |
| Brand:                    | Hirschmann            |
| Connector Type:           | Cordset, single ended |
| Type of Contact / Gender: | female                |
| Connector Design:         | angled                |
| Number of Pins:           | 4                     |
| Shielding:                | Unshielded            |
| Attachment Type:          | Central Screw         |
| Rated Voltage:            | 50V AC/DC             |
| Rated Impulse Voltage:    | 1.5 kV                |
| Operating Voltage:        | 50 V AC/DC            |
| Rated Current*:           | 10 A                  |
| Contact Resistance:       | ≤ 10 mOhm             |
| Mating Cycles:            | ≤ 50                  |
| Type of Connection:       | solder                |

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Ambient Temperature (Operation)*: | -40°C to +90°C                        |
| Protection Degree / IP Rating**:  | IP65                                  |
| Design Standard:                  | DIN EN 61984 (VDE 0627)               |
| Pollution Degree:                 | 3 acc. to DIN EN 60664-1 (VDE 0110-1) |
| Clearance / Creepage Distance:    | DIN EN 60664-1 (2008/01); VDE 0110-1  |

Materials

|                                      |               |
|--------------------------------------|---------------|
| Contact Base Material:               | CuZn          |
| Contact Plating:                     | Cu/Sn         |
| Contact Bearer Material:             | PA GF         |
| Contact Bearer Color:                | black         |
| Flammability Class (Contact Bearer): | UL 94 V-0     |
| Molded Body Material:                | PA GF         |
| Molded Body Color:                   | black         |
| Flammability Class (Molded Body):    | UL 94 V-0     |
| Attachment Material:                 | 4.8 , Fe/Zn B |
| Gasket Material:                     | NBR           |

Additional Technical Data

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Fastening Torque (Attachment):   | M 3: (50-60) Ncm                         |
| Mating Connectors / Fitting to:  | G 4 E 1 M..., G 4 A 1 M..., G 4 A 5 M... |
| Accessories to Order Separately: | Central Screw Stainless Steel: 732750003 |

Cable Data

|                                           |                  |
|-------------------------------------------|------------------|
| Cable Number:                             | PUR 4X0.75       |
| Conductor Size:                           | 0.75 mm²         |
| Number of Wires:                          | 4                |
| Minimal Bending Radius (Fixed Inst):      | > 5 x D          |
| Minimal Bending Radius (Flexible Inst):   | > 10 x D         |
| Conductor material:                       | Cu               |
| Cable Jacket Material:                    | PUR              |
| Cable Jacket Color:                       | black            |
| Cable Diameter D:                         | ø 7.2 ±0.25 mm   |
| Wire Insulation Material:                 | PVC              |
| Ambient Temperature (Fixed Installation): | -40 °C to +70 °C |
| Ambient Temperature (Flex Installation):  | +5 °C to +70 °C  |

Approvals

|      |                    |
|------|--------------------|
| VDE: | VDE-Reg.-Nr.: 3113 |
|------|--------------------|

Safety & Environmental Compliance

|                 |     |
|-----------------|-----|
| RoHS Compliant: | yes |
|-----------------|-----|

Notes

|                                     |                                                                                              |
|-------------------------------------|----------------------------------------------------------------------------------------------|
| Note Derating:                      | Notice derating                                                                              |
| Protection Degree / IP Rating Note: | ** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector. |
| Note:                               | Do not connect or disconnect under load.                                                     |

Variants

| Item #    | Item Description | Cable Length |
|-----------|------------------|--------------|
| 932884008 | G 4 KW 1 F 0,15M | 0.15 m       |
| 932884009 | G 4 KW 1 F 0.23M | 0.23 m       |

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.