


Datasheet

XKTO 11 Yellow RCA connectors



RCA Female socket acc. to JEITA RC-5231, straight version, with metal housing, bend protection and solder terminals

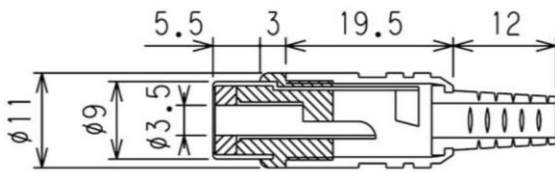

Environmental Conditions

Temperature range	-20 °C/+70 °C
-------------------	---------------

Materials

Insulating body	ABS
Inner contact	CuZn,nickel-plated
Outer contact	steel,nickel-plated
Housing	CuZn,nickel-plated
Bend protection sleeve	PVC

Mechanical data

Mating cycles	≥ 5000
insertion force	≤ 30 N
Withdrawal force	1-30 N

Connectable conductors for solder area

Cable diameter	4 mm
----------------	------

Electrical data (at T_{amb} 20 °C)

Rated current	2A
Rated voltage	34V AC/DC
Rated impulse voltage	250 V/60s
Insulation resistance	≥ 100 MΩ