


# PXP4041/C/C/3M00 Datasheet

**Product Name // Fully Overmoulded USB Cable**  
**PXP4041/C/C Series USB Standard C Plug To Sealed C-Type Plug 3m Cable**

 [View Product Page](#)

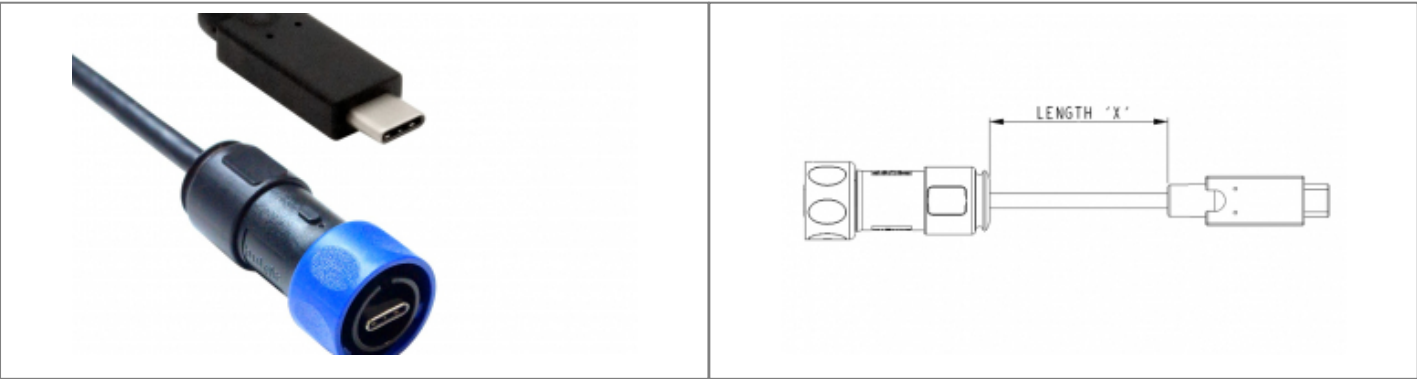

// **Product Description:**

- Pre-Wired C-Type USB 3.2 Gen 2x2 Cable
- Standard USB Type C plug to Sealed C-Type USB plug
- Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- 3m cable length
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043/C Rear Panel Mount Connector

// **General Information:**

|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Product Display Title:     | Pre-Wired C-Type USB V3.2 Cable                   |
| Product Family:            | Circular Data Connectors                          |
| Product Series:            | 4000 Series - C-Type USB Buccaneer                |
| Body Material:             | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Cable Length:              | 3m                                                |
| Contact Type:              | Plug Contact                                      |
| Coupling Type:             | Bayonet Lock                                      |
| Flamability Rating:        | UL94V-0                                           |
| Function:                  | Flex to Standard Connector Double Ended Cable     |
| Ip Rating:                 | IP67, IP68, IP69K                                 |
| Max Operating Temperature: | +80°C                                             |
| Min Operating Temperature: | -40°C                                             |
| Number Of Contacts:        | 24 Contacts                                       |

// **Product PDF Links**

