

15 KLB 13


Jack connectors



Jack chassis socket acc. to JIS C 6560 JC25J3A, 2.5 mm, 3 poles/stereo, with solder eyes, upright version, for back side mounting

15

KLB 13

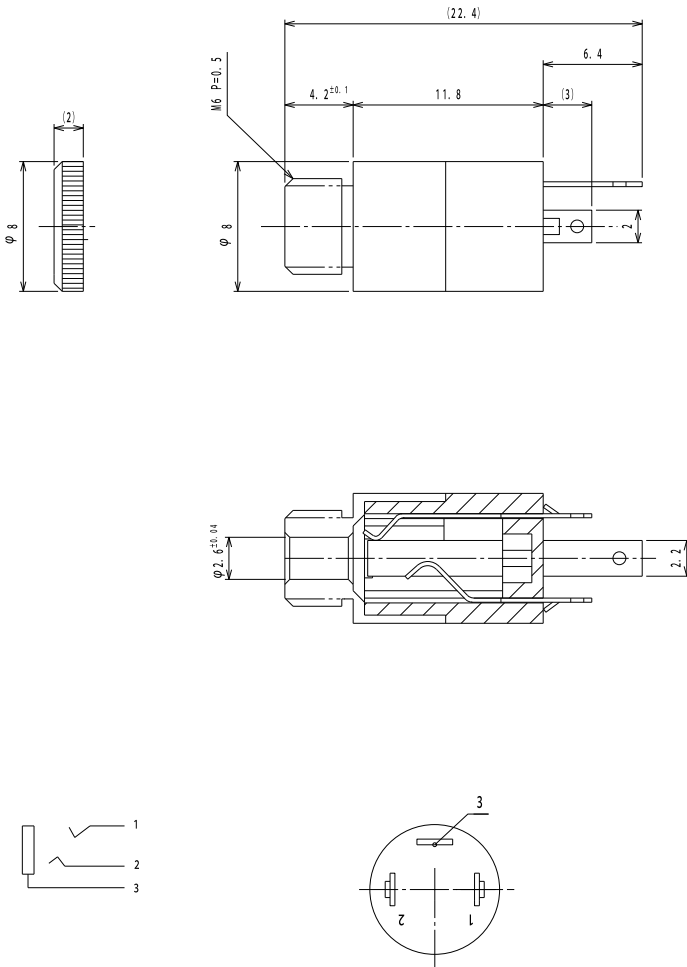

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body PBT GF, V-0 according to UL94, black or white
Contact spring Cu alloy, nickel-plated/gold-plated
Housing CuZn, nickel-plated
Knurled nut CuZn, nickel-plated

Mechanical data

Mating cycles ≥ 5000
Insertion force 5–20 N
Withdrawal force 4–20 N

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 50 m Ω
Rated current 0,5 A
Rated voltage 34 V AC/DC
Rated impulse voltage 500 V/60 s
Insulation resistance ≥ 100 M Ω

Associated products

Counterparts
☑ KLS 13

15

KLB 13

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
KLB 13	3	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag