


45 4580 03 OP T0,8

High-current contact elements



High-current contact bush, mateable from top or bottom direction, for tab contacts 0.8–1.5 mm, for printed circuit boards or lead frames

45 4580 03 OP T0,8

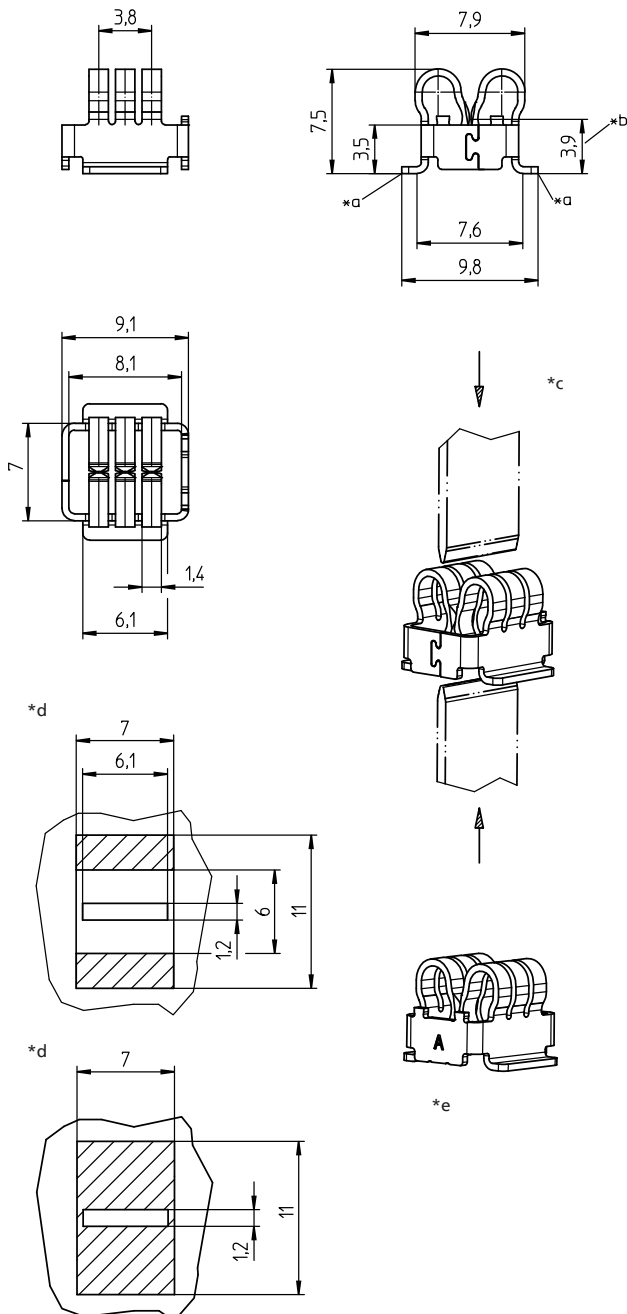

Environmental conditions

Temperature range -40 °C/+120 °C

Materials

Contact CuCr alloy, tin-plated

Mechanical data

Mating with tab contact 5.3 mm x 0.8-1.5 mm
applicable for reflow soldering on
printed circuit board
applicable for laser welding on
lead frame, e.g. Cu, tin-plated

Mating cycles ≤ 5

Insertion force
tab contact 0.8 mm
22 N $\pm$ 10 N – top or bottom entry
tab contact 1.0 mm
22 N $\pm$ 10 N – top or bottom entry
tab contact 1.5 mm
35 N $\pm$ 10 N – top or bottom entry¹

Withdrawal force 6 N +10/-3 N¹

¹ measured with polished steel test tabs

Electrical data (at T_{amb} 20 °C)

Contact resistance < 0.5 mΩ

Rated current ≤ 60 A¹

¹ depending on the connection to the printed circuit board/lead frame, installation situation and heat dissipation

- *a supporting surface for soldering – dimensions per solder pad
min. 7.5 mm x 2.0 mm
- *b height contact point
- *c mateable from top or bottom direction
- *d circuit board layout (example)
- *e marking A for type 4580 03 OP T0,8

45 4580 03 OP T0,8

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
4580 03 OP T0,8 V12VP12	1	350	2100

Packaging:

on reel