

73 733530


SmartSKEDD™ direct connectors, pitch 2.5/5.0 mm



SmartSKEDD direct connector, insulation displacement technology (IDT), with keying pins, positioning spigot and locking on the printed circuit board
contact pitch 5.0 mm

Approvals:  pending

73 733530

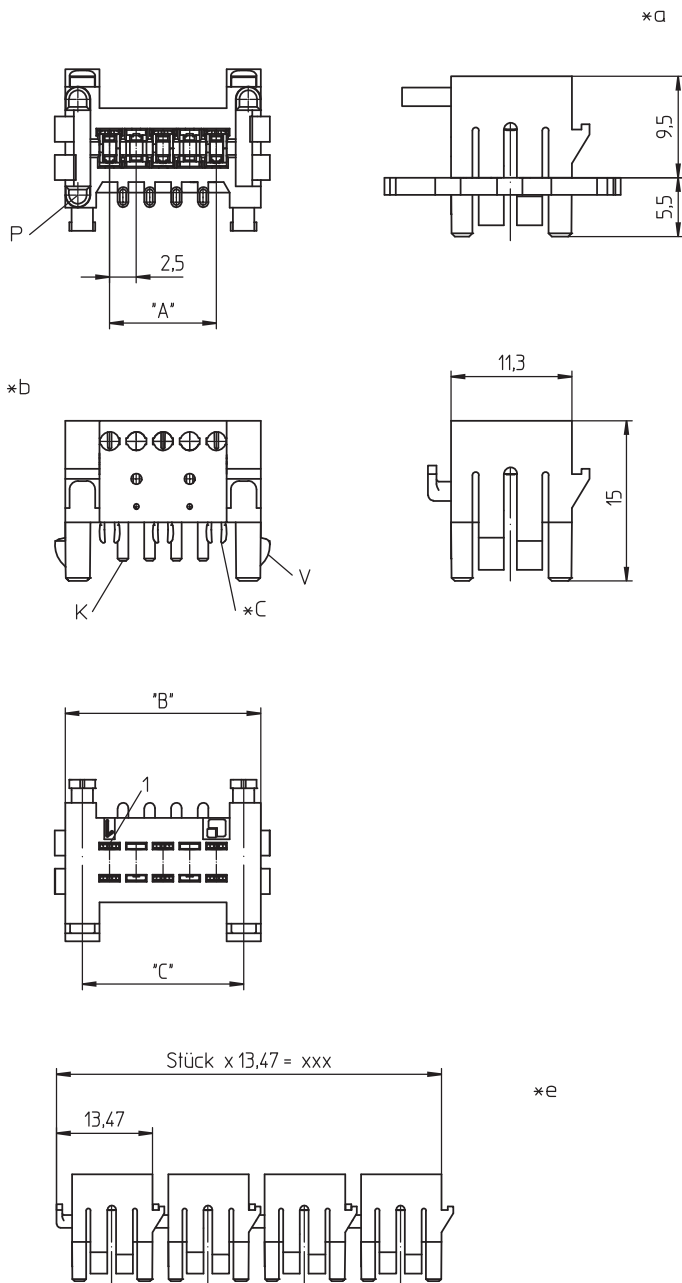

Environmental conditions

Temperature range -40 °C/+130 °C¹

¹ upper limit temperature (insulating body) RTI (electrical) of the UL Yellow Card

Materials

Insulating body PBT, V-0 nach UL94¹

Contact spring CuSn, silver-plated

¹ material halogen-free, GWFI 850 °C (0,40 mm), GWIT 775 °C (0,40 mm)

Mechanical data

Mating with printed circuit board 1.6 ± 0.14 mm

Insertion force/contact ≤ 3 N

Withdrawal force/contact ≥ 3 N

Retaining force/locking ≥ 50 N

Connectable conductors for IDT area

Construction discrete conductor, notched flat cable 2.5 mm

Section min. 0,22 mm²

Section max. 0,38 mm²

Insulation diameter ≤ 1.6 mm

Approved cables at www.lumberg.com 

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 5 mΩ

Rated current 4 A (T_{amb} 85 °C)

Rated voltage 500 V AC¹

Material group I (IEC)/0 (UL) (CTI ≥ 600)¹

Creepage distance 3,0 mm

Clearance 3,0 mm

Insulation resistance > 1 GΩ


¹ according to IEC 60664/DIN EN 60664, CTI UL classification according to ANSI/UL 746A

Associated products

Harnessing equipment

 HA7335e

 HA7335e-CA

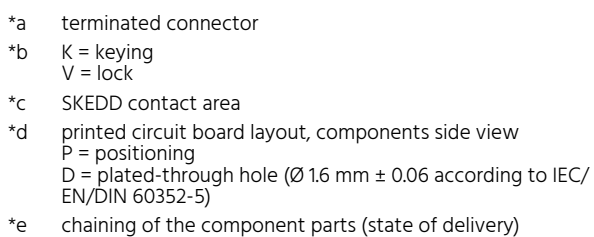

73 733530

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions			
				A (mm)	B (mm)	C (mm)	D (mm)
733530 02	2	1575	1575	17.5	25.8	22.6	23.45
733530 03	3	1260	1260	5.0	13.3	10.1	10.95
733530 04	4	945	945	7.5	15.8	12.6	13.45
733530 05	5	630	630	10.0	18.3	15.1	15.95
733530 06	6	630	630	12.5	20.8	17.6	18.45
733530 07	7	630	630	15.0	23.3	20.1	20.95

Packaging:

chained, in a cardboard box