


RF240A2JEGADGA Datasheet

Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

[View Product Page](#)

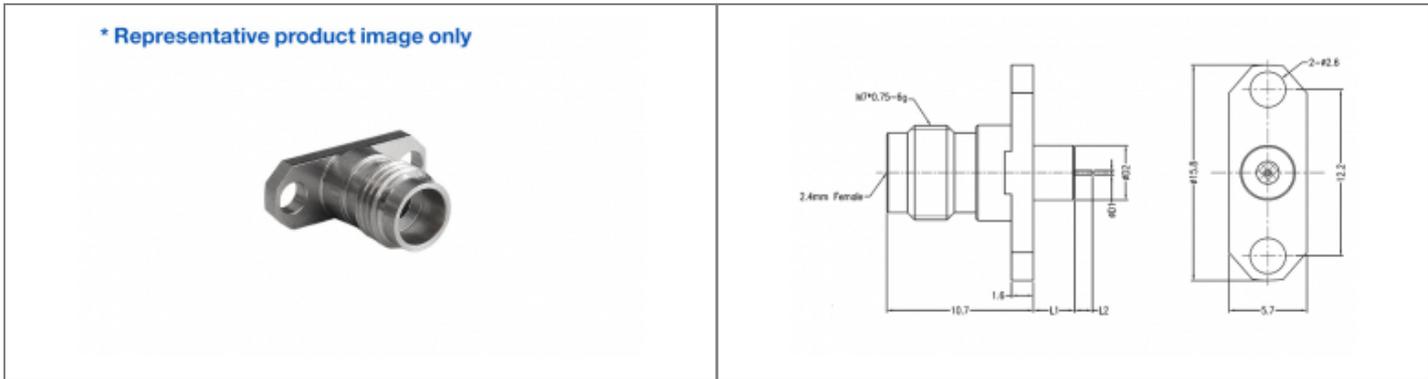

// Product Description:

<ul style="list-style-type: none"> ⬢ 2.4mm Jack Straight 2 Hole Flange RF Connector ⬢ Maximum Voltage: 150V ⬢ Temperature range: -40Â°C to +85Â°C ⬢ Frequency range: 0GHz - 50GHz ⬢ VSWR: 	<ul style="list-style-type: none"> ⬢ Dielectric withstanding Voltage: >500V ⬢ Impedance: 50Ohm ⬢ Body Material: Stainless Steel Passivation ⬢ Contact Material: Beryllium Copper
--	---

// General Information:

<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Body Length:</p> <p>Body Material:</p> <p>Centre Contact Retention Force:</p> <p>Contact Pin Material:</p> <p>Min Coupling Torque:</p> <p>Max Coupling Torque:</p> <p>Dielectric Withstanding Voltage:</p> <p>Durability:</p> <p>Flange Mount Length:</p> <p>Function:</p> <p>Impedance:</p> <p>Insulation Resistance:</p> <p>Insulator:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Mount Hole Distance:</p> <p>Min Operating Frequency:</p> <p>Max Operating Frequency:</p> <p>Pin Diameter:</p> <p>Pin Length:</p> <p>Ptfe Diameter:</p> <p>Ptfe Length:</p> <p>Voltage Max:</p> <p>Vswr:</p>	<p>2.40mm Series Pin with Extended PTFE 2 Hole Flange</p> <p>Radio Frequency Connectors</p> <p>2.40mm Series</p> <p>10.70mm</p> <p>Stainless Steel Passivation</p> <p>>20N</p> <p>Beryllium Copper</p> <p>0.80Nm</p> <p>1.10Nm</p> <p>>500V</p> <p>>500 cycles</p> <p>15.80mm</p> <p>Female Flange Mount RF Connector</p> <p>50Ohm</p> <p>>5000MOhm</p> <p>UNFILLED ULTEM 1000/PEI</p> <p>+85°C</p> <p>-40°C</p> <p>12.20mm</p> <p>0GHz</p> <p>50GHz</p> <p>0.30mm</p> <p>1.50mm</p> <p>4.00mm</p> <p>1.40mm</p> <p>150V</p> <p><1.30</p>
--	--

// Product PDF Links

[2.40mm Series Product Datasheet](#)