


KS-4N-19

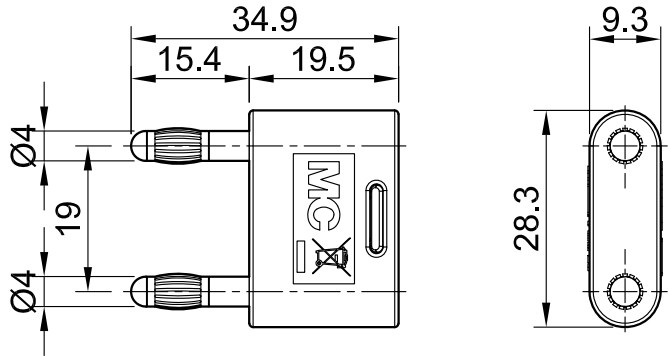

Item number 64.4012-*

Insulated, \varnothing 4 mm, made of brass. Plugs with spring-loaded MULTILAM contact technology. With insulated grip. At rear without in-line \varnothing 4 mm rigid sockets.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	<div><div>20</div><div>21</div><div>22</div><div>23</div><div>24</div><div>25</div><div>26</div><div>27</div><div>28</div><div>29</div><div>30</div></div>
Plug spacing	19 mm
Test accessory acc. to	IEC EN 61010-031
User-Information	I 099