


RFSMACJABC Datasheet

Product Name // SMA Jack Edge Launch RF Connector,
PCB Thickness

 [View Product Page](#)

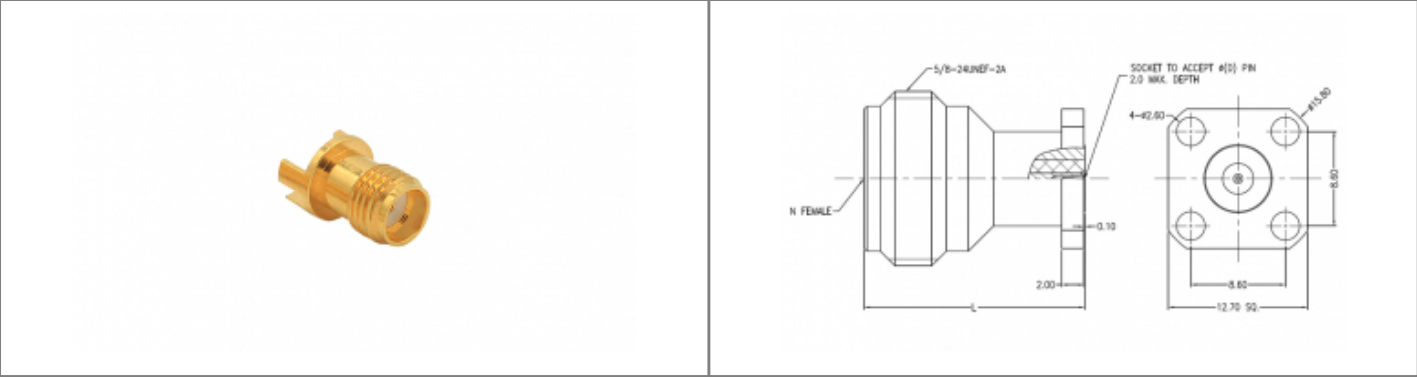

// Product Description:

- SMA Jack Edge Launch RF Connector, PCB Thickness
 - Maximum Voltage: 335V
 - Temperature range: -55Â°C to +155Â°C
 - Frecuency range: 0GHz - 26.5GHz
 - VSWR:
- Dielectric withstanding Voltage: >750V
 - Impedance: 50Ohm
 - Body Material: Brass Copper with gold 10u" plating
 - Contact Material: Beryllium Copper

// General Information:

Product Display Title:	SMA Series Edge Launch Connector
Product Family:	Radio Frequency Connectors
Product Series:	SMA Series
Body Length:	11.70mm
Body Material:	Brass Copper with gold 10u" plating
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female Edge Launch RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000
Max Operating Temperature:	+155°C
Min Operating Temperature:	-55°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	26.5GHz
Pcb Thickness:	1.78mm
Pin Diameter:	0.30mm
Pin Length:	1.22mm
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.30

// Product PDF Links



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)