


Oscilloscope probes in compact design

Isoprobe IV – 10:1

Safety high-frequency 10:1 test probe of compact design. With wide frequency range combined with low input capacitance. Highly flexible PVC-insulated coaxial connecting

lead with BNC plug with integrated compensation unit. Facility for connecting reference lead in the front part of the probe.

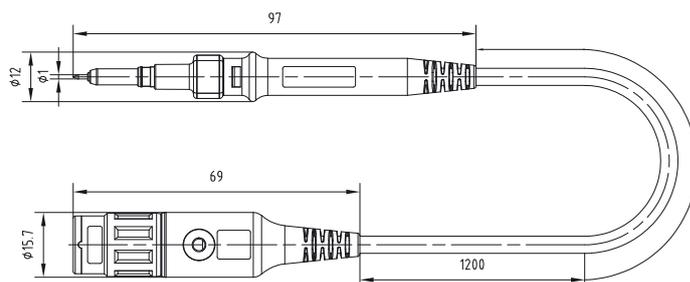

Order No.	Type		Lead length [cm]	Colour
68.9366-12028	Isoprobe IV - 10:1	PVC CE	120	28

Technical Data		
	Shield / earth	Probe tip / shield
Rated voltage (frequency-dependent)	Max. 300 V, CAT III	Max. 300 V _{r.m.s}
Dividing ratio	10:1	
Input capacitance	11 pF	
Compensation range (works setting)	10 pF ... 25 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



RZ Sheet RZ103

www.staubli.com/electrical