

Datasheet

ZS 12 1





Safety-Universal Plug With screwed strain relief 16A

Fitting for cigarette lighter and standard sockets, screw terminals for cables up to 2.5 mm², adaptor that can be firmly positioned by a bayonet catch, swing-out puller tool.

Materials	Housing: Polycarbonate
	Connection spring: Cu Sn 6
	surface: shiny pickled
	Contact spring: Cu Zn 37 F45
	surface: gal. Ni 5
Operation	Plug pin: Cu Zn 40 Pb 2
	Surface: gal. Ni 5
Connectable	Voltage range: max. 24 Volt
	Max. current load: max. 16 Ampere
	Temperature load : Max. 135 °C
	screw terminals
	Cable 2x2.5 mm ²

Datasheet

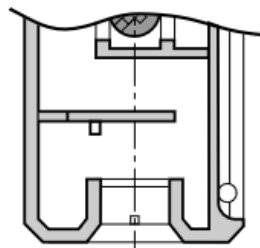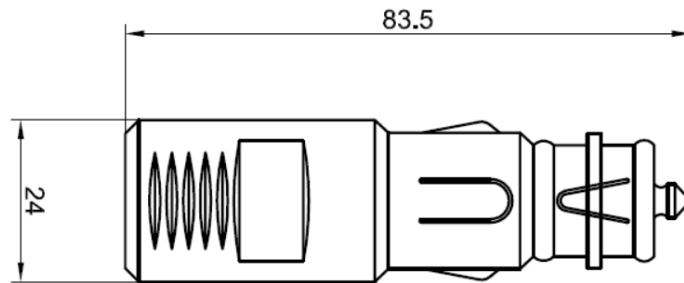

**maze-like
strain relief**