

16

1636 01

Power supply connectors




Power supply plug acc. to JEITA RC-5320A JSAP1, straight version, with solder eyes and bend protection

State: Obsolete

16

1636 01

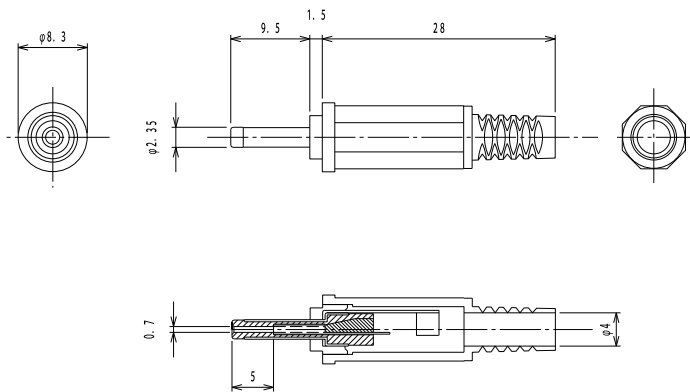

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body POM, HB according to UL94
Contact CuZn, nickel-plated
Housing PE

Mechanical data

Outer diameter 2.35 mm
Inner diameter 0.7 mm

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Rated current 2 A
Rated voltage 3.15 V DC
Rated impulse voltage 500 V/60 s
Insulation resistance $\geq 100 \text{ M}\Omega$

Associated products

Counterparts
↗ 1613 03 ↗ 1613 25

16

1636 01

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1636 01	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag