


PX0400/011/3S Datasheet

Product Name // Overmould Flex Cable Connector PX0400
Series Pre-Wired 11M Cable 3 Contact Socket

 [View Product Page](#)

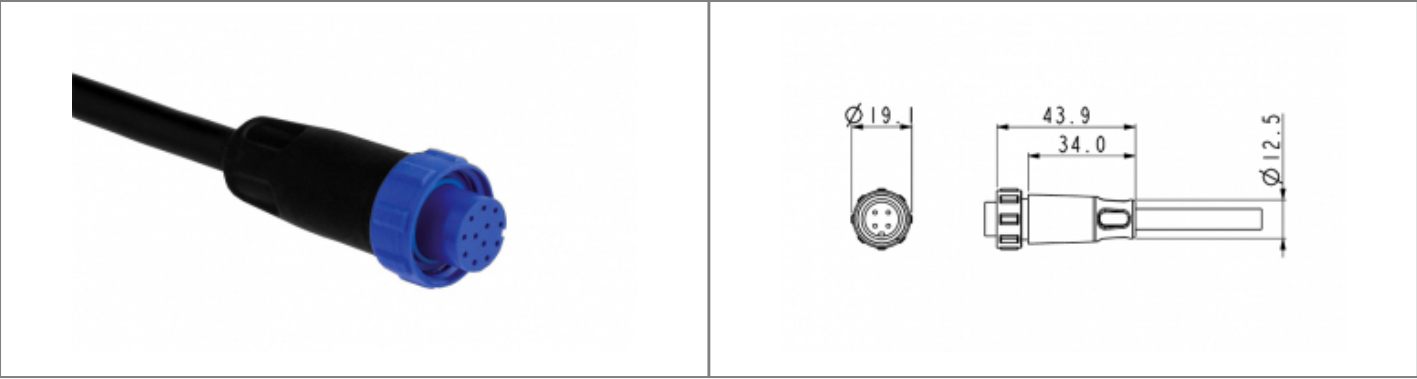

// Product Description:

Overmoulded Flex Connector pre-wired cable assemblies

Water and dustproof to IP68 when mated with compatible connector

Pin or Socket

2, 3, 4, 6, 8, 10 or 12 Contact

Cable acceptance 2.5mm-9mm

Choice of cable length depending on part code

PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors

Mate with PX0401, PX0411 Inline Connectors and PX0412, PX0413 Panel Mount Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Cable Length:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Overmoulded Flex Connector pre-wired cable assemblies

Circular Power Connectors

400 Series Buccaneer

CSA, UL, VDE

Polyurethane (PU)

11m

Socket Contact

Screw

8A

19.1mm

UL94V-HB

Flex Connector Single Ended Cable

IP68, IP69K

+85°C

-20°C

3 Contacts

250V

// Product PDF Links

 400 Series power connectors...

 Have a question or project enquiry you'd like to talk to us about?

 [Click Here To Contact Us](#)

Bulgin Datasheets 1