

15

1501 07

Jack connectors




Jack chassis socket acc. to JIS C 6560 JC25J3B, 2.5 mm, 3 poles/stereo, angular version, with 2 break contacts, for printed circuit boards, surface mounting technology (SMT)

State: Obsolete

15

1501 07

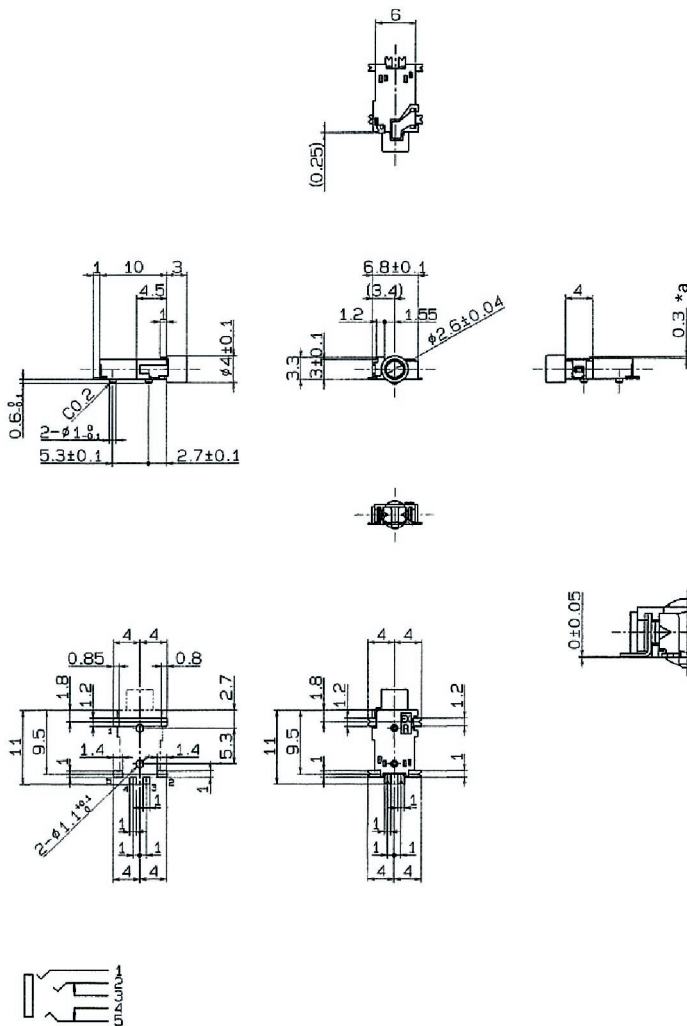

Environmental conditions

Temperature range -20 °C/+60 °C

Materials

Insulating body PA
Contact spring BeCu alloy, silver-plated

Mechanical data

Mating cycles ≥ 5000

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 30 m Ω
Rated current 0,5 A
Rated voltage 34 V AC/DC
Rated impulse voltage 250 V/60 s
Insulation resistance ≥ 100 M Ω

Associated products

Counterparts
☒ KLS 13

*a with mated plug

15

1501 07

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1501 07 R	3	1500	1500

Packaging:

on reel