


45 4580 03 MP T0,8

High-current contact elements



High-current contact bush with positioning pegs,
mateable from top or bottom direction, for tab contacts
0.8–1.5 mm, for printed circuit boards or lead frames

45 4580 03 MP T0,8

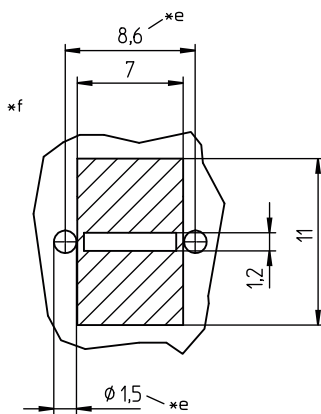

- *a supporting surface for soldering – dimensions per solder pad
min. 7.0 mm x 2.5 mm
- *b height contact point
- *c positioning peg
- *d von oben oder unten steckbar
- *e bore holes for positioning pegs
- *f circuit board layout (example)
- *g marking A for type 4580 03 MP T0,8

45 4580 03 MP T0,8

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
4580 03 MP T0,8 V12VP12	1	350	2100

Packaging:

on reel