


01 0134

DIN circular connectors




DIN plug with bayonet lock, angular version, contact carrier mountable in 0°, 90°, 180° and 270° orientation, shielded, with metal housing, bend protection and solder terminals

01 0134

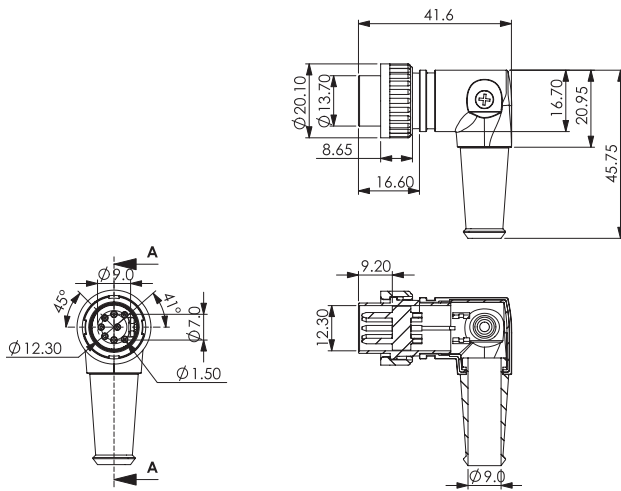


Pin configurations, solder side view

DIN 41524




0134 03




0134 04

DIN 41524




0134 05

DIN 45322




0134 05-1

DIN 45322




0134 06

DIN 45329



0134 07-1

DIN 45326



0134 08-1

Environmental conditions

Temperature range -25 °C/+80 °C

Materials

Insulating body	PA, V-0 according to UL94
Contact pin	CuZn, silver-plated
Strain relief	steel, nickel-plated
Housing	Zn alloy, nickel-plated
Bayonet nut	Zn alloy, nickel-plated
Bend protection sleeve	PVC
Screw	steel, nickel-plated

Connectable conductors for solder area

Section	≤ AWG 19 (0.65 mm ²)
Cable diameter	9.0 mm

Electrical data (at T_{amb} 20 °C)

Rated current	4 A
Rated voltage	100 V AC
Rated impulse voltage	250 V AC RMS/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts
[0107](#) [0122](#)

01 0134

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0134 03	3	50	150
0134 04	4	50	150
0134 05	5	50	150
0134 05-1	5	50	150
0134 07-1	7	50	150
0134 08-1	8	50	150

Packaging:

in individual plastic bags, in a cardboard box