

15

1532 06



Jack connectors



Jack plug acc. to JIS C 6560 JC35P2, 3.5 mm, 2 poles/mono, straight version, cone headed, with bend protection and solder terminals

15

1532 06

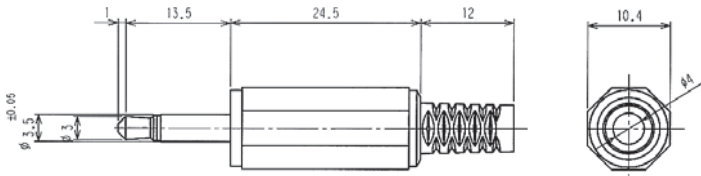

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	PF
Contact	CuZn/steel, nickel-plated
Insulation	hard rubber/PVC
Housing	PE

Mechanical data

Mating cycles ≥ 5000

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 50 m Ω
Rated current	1 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 M Ω

Associated products

Counterparts
 ↗ 1502 03 ↗ 1503 22 ↗ 1522 02
 ↗ 1522 03

15

1532 06

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1532 06	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag