

35 357099

RAST 2.5 connectors, pitch 2.5/5.0 mm




RAST 2.5 Power connector for direct and indirect mating,
with double-sided keying, insulation displacement
technology (IDT), consecutive placement without loss of
pitch
contact pitch 5.0 mm

Approvals:



35 357099

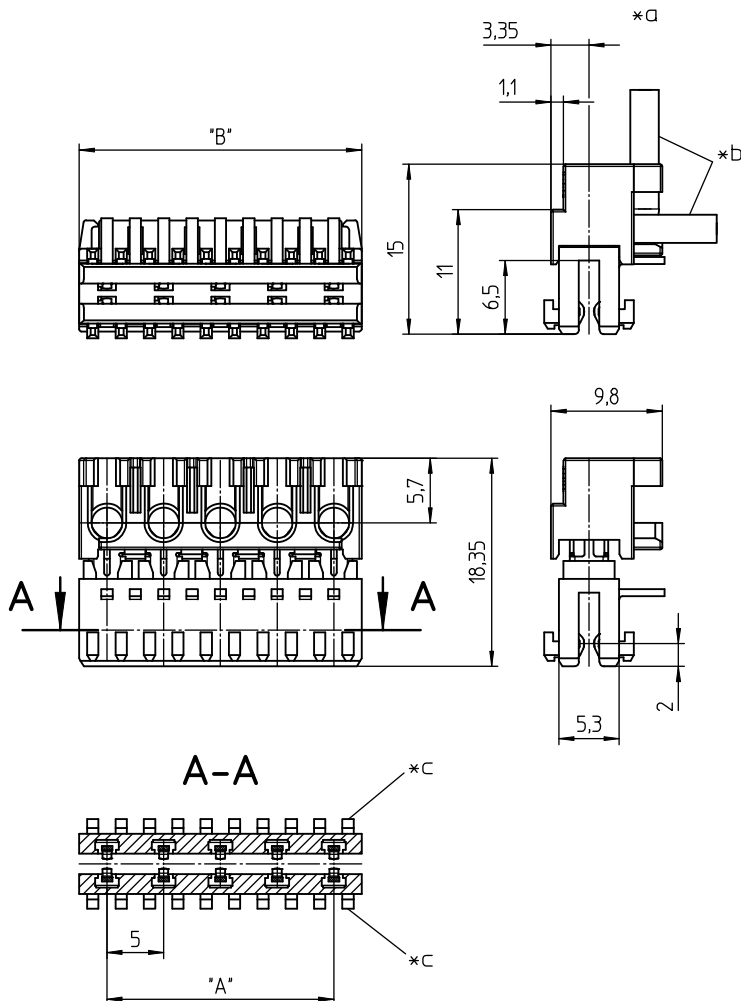

Environmental conditions

Temperature range -40 °C/+130 °C¹

¹ upper limit temperature (insulating body) RTI (electrical) of the UL Yellow Card

Materials

Insulating body PBT GF, V-0 according to UL94 – 357099
PA, V-2 according to UL94 – 357099 M09¹

Contact spring Cu alloy, silver-plated – 357099
Cu alloy, tin-plated – 357099 V03

¹ M09: component glow wire resistant (GWT 750 °C), testing acc. to IEC 60695-2-11, assessment acc. to IEC 60335-1 (flame < 2 s)

Mechanical data

Mating with printed circuit board 1.5 ± 0.14 mm
Insertion force/contact ≤ 4.0 N
Withdrawal force/contact ≥ 0.5 N
Keying proposals at www.lumberg.com 


Connectable conductors for IDT area

Construction discrete conductor, notched flat cable 5.0 mm
Section min. 0.35 mm²
Section max. 0.82 mm²
Insulation diameter ≤ 2.5 mm
Approved cables at www.lumberg.com 

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 5 mΩ
Rated current 357099:
6 A (T_{amb} 70 °C)
10 A (indirect mating, 2-5 poles)
357099 V03:
6 A (T_{amb} 70 °C, max. 4 poles under load)
Rated voltage 400 V AC
Material group IIIa (IEC)/2 (UL) (CTI ≥ 250)
Creepage distance ≥ 4,0 mm
Clearance ≥ 4,0 mm
Insulation resistance > 1 GΩ

35 357099

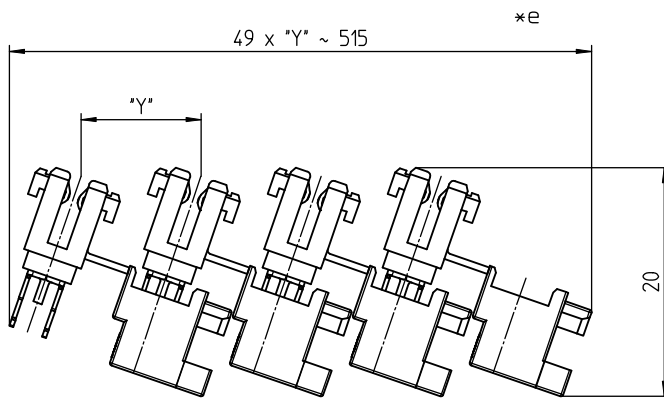

Associated products

Counterparts

☑ 355295 ☑ 355299

Harnessing equipment

☑ HA3...e	☑ HA357e	☑ HA357e-CA
☑ HA357f-CA-KC-KT	☑ HZ-M357	☑ KHP357
☑ VARICON 7000	☑ VARICON 7000-Eco	☑ VARICON 7000-Eco-CR
☑ VARICON 7000-Inline	☑ VARICON 7000-Inline-CR	☑ VARICON 7000-RD
☑ VARICON 7000-RD-CR	☑ VARICON 7000-Unica-357	

- *a terminated connector
- *b cable departure
- *c keying
- *e chaining of the component parts (state of delivery)

35 357099

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions	
				A (mm)	B (mm)
357099 02	2	3528	3528	5	9.9
357099 03	3	2352	2352	10	14.9
357099 04	4	1764	1764	15	19.9
357099 05	5	1176	2352	20	24.9
357099 06	6	1176	2352	25	29.9
357099 07	7	882	2646	30	34.9

Designation to be completed by further details (e.g. for keying, color or material options).

Packaging:

chained, in a cardboard box