


PXP4013/08S Datasheet

Product Name // Rear Panel Mount Connector Body
PXP4013 Series 8 Contact Socket

 View Product Page

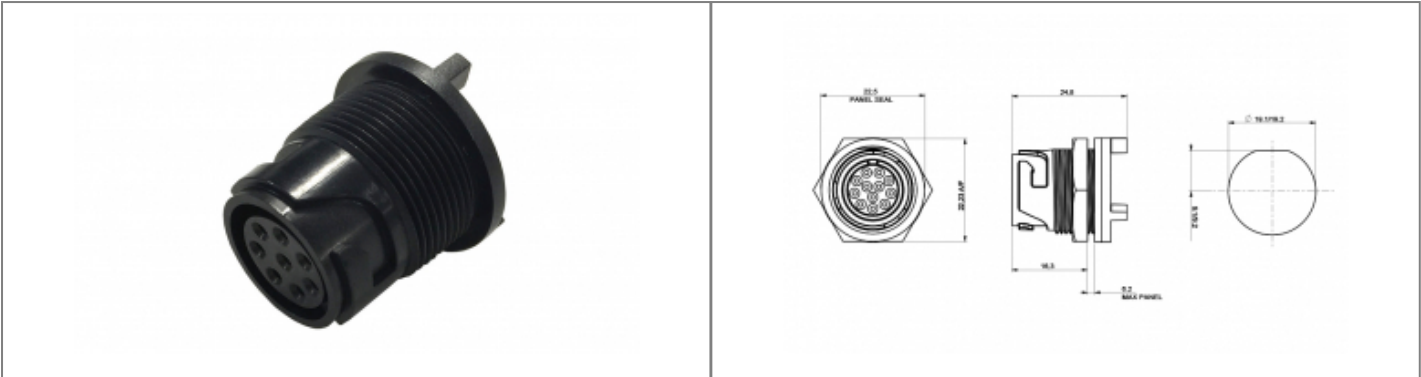

// Product Description:

- Rear Panel Mount Connector
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- Single hole fixing
- Pin or Socket
- 2, 3, 4, 6, 8, 10 or 12 Contact
- Choice of:
- Cable connector version uses Crimp or Solder Contacts (supplied separately; use 13A/10A for 2, 3 Contact, 8A/5A for 4, 6, 8 Contact, 3A/3A for 10, 12 Contact), contact insertion and crimp tools available separately
- PCB mount version (part codes suffixed /PC) use straight PCB spills and are supplied complete with pre-loaded gold plated contacts
- PXP4083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Flex Cable Connectors PXP4010, PXP4011

// General Information:

Product Display Title:	Rear Panel Mount Connector
Product Family:	Circular Power Connectors
Product Series:	4000 Series Buccaneer
Approvals:	CSA
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	5A
Diameter Over Coupling Ring Mm:	19.7mm
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Ip Rating:	IP66
Max Contact Accomodation Awg:	20AWG
Min Contact Accomodation Awg:	18AWG
Max Contact Accomodation Mm2:	0.82mm2
Min Contact Accomodation Mm2:	0.52mm2
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Number Of Contacts:	8 Contacts
Voltage Max:	320V

// Product PDF Links

-  4000 Series power connectors...
-  4000 Series power connectors...

// Product 3D CAD Model Links

-  PXP4013/08S3D CAD Model

// Product Certificate Links

-  UL & CSA EN214792 - 4000 Series...
-  VDE Certificate - 4000 Series...
-  IP68 Test Certificate - 4000...
-  IP69X Test Certificate - 4000...
-  Salt Spray Test Certificate - 4000...



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)