


Datasheet

XSTO 11 RED RCA connectors



RCA plug acc. to JEITA RC-5231, straight version, with metal housing, bend protection and solder terminals

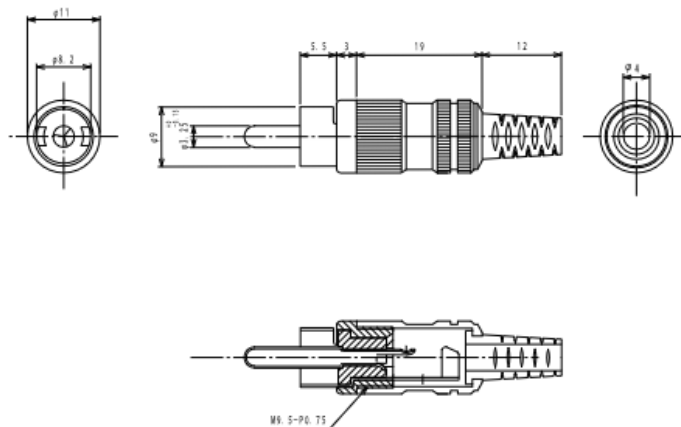

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	ABS
Inner contact	CuZn, nickel-plated
Outer contact	steel, nickel-plated
Housing	CuZn, nickel-plated
Bend protection sleeve	PVC

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Rated current	2 A
Rated voltage	34 V AC/DC
Rated impulse voltage	250 V/60 s
Insulation resistance	$\geq 100 \text{ M}\Omega$