


RFTERMSMAJ2W Datasheet

Product Name // SMA Jack Termination (2W)

 [View Product Page](#)

* Representative product image only

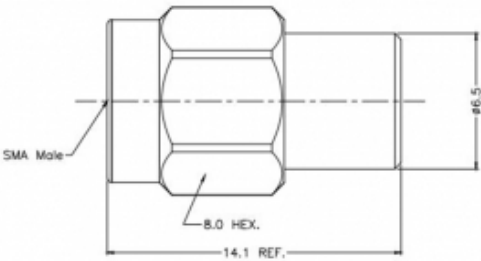

// Product Description:

- SMA Jack Termination (2W)
- Maximum Voltage: 335V
- Temperature range: -65Â°C to +165Â°C
- Frecuency range: 0GHz - 18GHz
- VSWR:
- Dielectric withstanding Voltage: >750V
- Impedance: 50Ohm
- Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Termination Series SMA
Product Family:	Radio Frequency Connectors
Product Series:	RF Termination Series
Average Power:	<2W
Body Length:	12.20mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female RF Termination
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.20

// Product PDF Links

 [RF Termination Series Product...](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)