

15

1530 02



Jack connectors



Jack plug, 2.5 mm, 4 poles/stereo, straight version, with bend protection and solder terminals

15

1530 02

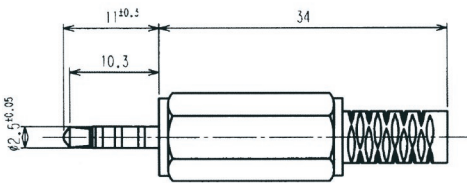

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	POM
Contact	CuZn, nickel-plated
Connector thread	CuZn, nickel-plated
Housing	PE

Connectable conductors for solder area

Cable diameter 4,0 mm

Electrical data (at T_{amb} 20 °C)

Rated impulse voltage	500 V AC/60 s
Insulation resistance	> 100 MΩ

Associated products

Counterparts
☞ 1500 01

15

1530 02

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1530 02	4	100	200

Packaging:

in bulk in a cardboard box or a plastic bag